


Fall
Protection
Only

neofeu)



by **PMS GROUP**
FABRICANT FRANÇAIS

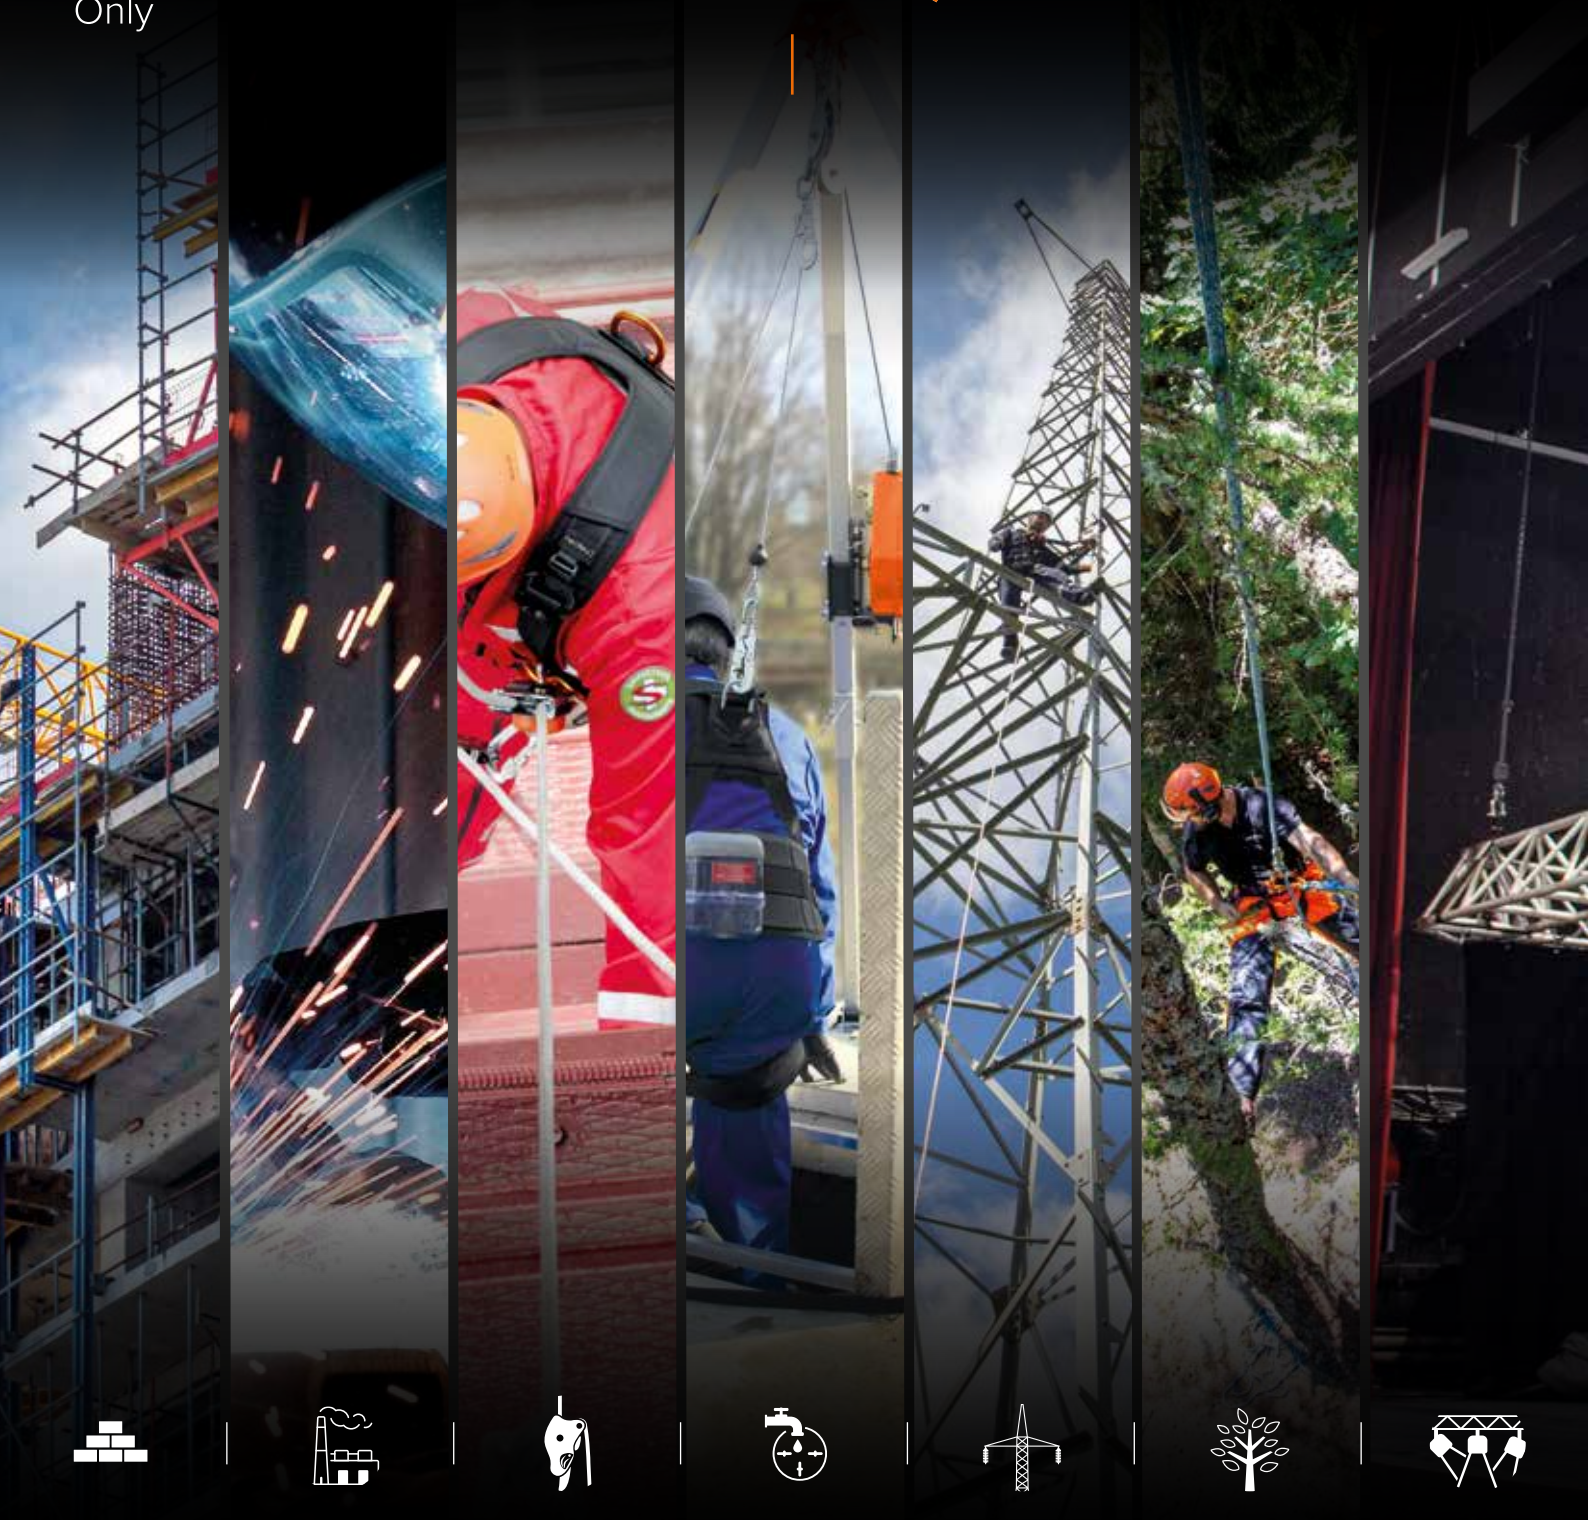

BEST OF

PROFESSIONAL | EDITION 1

MANUFACTURING, STANDARDS & REGULATION



SAFETY | QUALITY | TRACEABILITY



TABLE OF CONTENTS

INFORMATION

NEOFEU	// 03	OUR MARKETING TOOLS	// 05
OUR DIFFERENCES	// 04	CSR COMMITMENTS	// 06
THE GROUP	// 05	KNOWLEDGE BASE	// 07
OUR NEWS	// 05	YOUR INDUSTRIES	// 10

INNOVATION

FULL BODY HARNESSES

ILE'O®	// 12	Pack&G'O®	// 14
ALT'O®	// 12	KTP EVO	// 14
VIT'O®	// 13	NUS55/C	// 15
ARB'O®	// 13	ECO	// 15

SETS BY INDUSTRY

ROOF	// 16	CONSTRUCTION	// 17
ECO ROOF	// 16	POLE	// 17
AERIAL WORK PLATFORM	// 16	PLATFORM	// 17
SCAFFOLD	// 16	PACKAGING IN CARDBOARD BOX	// 17

LANYARDS AND ABSORBERS

ABS'O® ED\GE : ELASTIC	// 18	CONNECTING LANYARD	// 19
ABS'O® ED\GE : ROPE	// 18	ERG'O®	// 19
ABS'O®	// 18	PACKAGING IN CARDBOARD BOX	// 19

RETRACTABLE TYPE FALL ARRESTERS

EAGLE EDGE®	// 20	EDGE NEO020	// 20
NEO EDGE EVO®	// 20		

ANCHOR DEVICES

ALUMINUM TRIPOD	// 21	WEBBING SLINGS	// 21
MOBILE LIFELINE	// 21	FIXED ANCHORS	// 21
LAN'O®	// 21		

ACCESSORIES

PEGASO WORK : INDUSTRIAL HELMET	// 22	TOOLS TETHERING	// 22
TRANSPORT BAGS	// 22		

LOAD FALL ARRESTERS

// 22

WHO ARE WE ?

HISTORY

NEOFEU is a long time experienced company, created in the 1950s. The **fire equipment activity** that led to the name NEOFEU, was sold in September 2000. Since then, the company only focus is on **protection against fall from height**.

In a very concentrated sector, **NEOFEU**, is positioned on the French market as one of the last independent company dedicated to this industry.

The core business of the company is the **design, manufacture, marketing, advice** for use, **maintenance** of personal protective equipment against fall from a height and **load arresters** (up to 5 tons).



EXPERTISE

We offer our customers a complete range of products **designed and manufactured locally**, complemented by brands renowned for their high level of technical expertise. All products comply with **standards in force**.


The products manufactured by NEOFEU are subject to **individual controls** in **its test center**, so they comply with the most stringent safety standards.



INNOVATION

Our integrated technical department uses the latest **CAD and 3D printing** technologies. It allows us to control prototyping and to innovate continuously.

NEOFEU is also a **60 years old experience** company and the warranty of a **french manufacturer** of products recognized for their **high level of quality**.

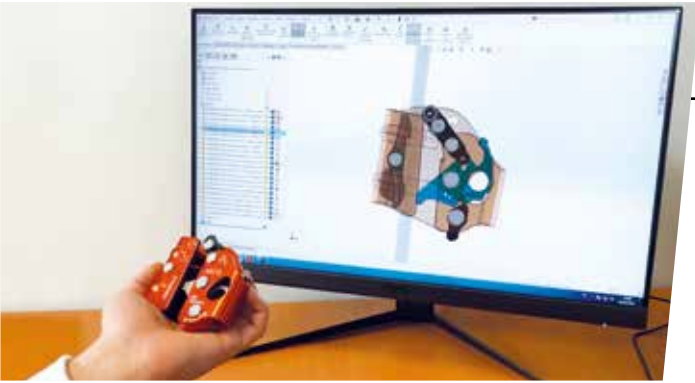


PRODUCTION

A **textile workshop**, a **mechanical production center**, measuring instruments, and a **drop tower** all located in the same facility. A wide range of fall protection products manufactured in **our Beauvallon factory**.

Our organization enables us to maintain **control and traceability** on raw materials, components, and finished products.





FRENCH MANUFACTURER




Each product with this flag has been designed in France

By choosing **NEOFEU**, a renowned French manufacturer, you fully benefit from our **expertise** and our **commitment to quality**. Whether it concerns standard or specific products, you receive full **support throughout the process** to meet your requirements. With NEOFEU, your trust a French manufacturer is turned into reliable, high-performance, and durable products.

PROXIMITY

Choosing a French manufacturer also means proximity and also, responsiveness !

Special needs ? Our teams are flexible to suit your needs.

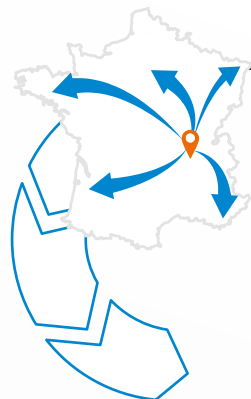

QUALITY

The selection of high-quality components, strict compliance to standards and our longstanding expertise grant us a high level of manufacturing performance.



TRACEABILITY

Each component of each product is traced and tested to ensure the safety of all our productions. Finished products are also periodically tested to ensure maximum safety.



THE GROUP TODAY

In november 2018 NEOFEU integrated **PMS Group**, which benefits from an international presence throughout different sites and subsidiaries in France, Italy, Tunisia and the United Arab Emirates.

Working with **PMS Group** is the choice for the **quality of a unique expertise**, the experience of a manufacturer and the strength of a dedicated team of employees. The group offers products compliant with European standards and enjoys **the trust of the most requiring customers**.

This year, the group bids farewell and wishes a well-deserved retirement to its CEO, Patrick DESFORET. In order to ensure the continuity of the PMS group, all partners remain on board and decide to integrate the **UNITEX** group.

This collaboration with UNITEX is a chance for PMS group to further develop, through opportunities offered by this international group.



by **PMS GROUP**
FABRICANT FRANÇAIS

UNITEX GROUP



by **PMS GROUP**
FABRICANT FRANÇAIS



OUR NEWS

Stay updated on all NEOFEU news throughout our **social media channels** : explore product information, stay in the loop about new releases, and access exclusive offers. Feel free to " like, comment, and share ! ".



OUR MARKETING TOOLS

Retailers, distributors, platforms are the necessary tools for the turnover development.


In our commitment to built **partnership** and to **increase our sales together**, we offer you effective marketing solutions.

Our communication media can be **customized** to fit **your image**. Contact our sales department for further information.




PRODUCTS PACKAGING

Products easy to carry, to store and attractive. We constantly adapt our solutions to offer you more convenient and environment-friendly packaging.

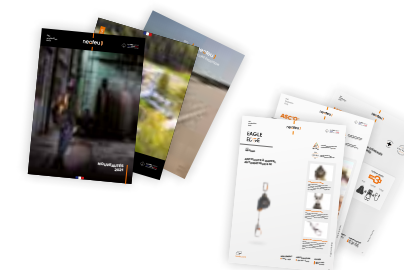

INTEGRATED MARKETING DEPARTMENT

Data sheets, user manuals, advice, promotional campaigns, catalogues.... For use within your own networks or intended for the user.

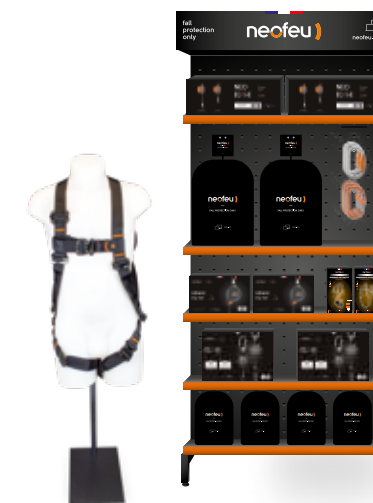

DISPLAYS AND SHELF SPACES

We offer the complete installation of your shelf spaces and have available the necessary accessories to fit your existing shelves (magnetic banners, torso on foot...).

In 2022 as a committed player, **NEOFEU** achieved a greenhouse gas emissions assessment and committed itself into a transition process through « **Décarbon'Action** » a program held by **Bpifrance** in partnership with **ADEME** (French Environmental and Energy Management Agency) and **Association Bilan Carbon** (Carbon Balance Association).

THE MISSION

To establish an initial quantitative assessment of our greenhouse gas (CO2) emissions for a reference year, in order to analyze and implement targeted actions.



DETAILED STUDY

We have studied different scopes* surrounding NEOFEU and analyzed several elements: raw materials, subcontractors, packaging, freight, travel, equipment, direct waste, and energies.

All the data collected has been converted into CO2 emissions, allowing us to obtain a breakdown of the company's greenhouse gas (GHG) emissions.

*Scopes refer to the boundary within which greenhouse gas (GHG) emissions of the organization or product in question are studied.



TARGET FIXED

A target for reducing greenhouse gas emissions by **5% per year by 2030** has been validated (Energy-Climate Law).

This will be possible through targeted actions that will have a lasting impact on our production methods and the way we design our products.



ACTIONS



Production unit
in France



Diminution of plastic
packaging



Choice on the
component's origin



Repairability and
lifespan of products



Sorting and valuation
of garbage



MEMBER OF
LE COQ VERT

Community goal : create collective drive in favor of the ecological and energy transition (EET).



MEMBER OF
LA FRENCH FAB

Group of companies, economic actors, based in France with the desire to develop the French industry.

REGULATION UE 2016/425



The Regulation lays down new requirements for the design and manufacture of PPE which is to be made available on the market in order to ensure protection of the health and safety of users and established rules on the free movement of PPE in the Union.

The PPE are still classified as PPE of category 3 “lethal risk”. The new obligations for the manufacturers as follows :

- Every single PPE must be delivered with a EU declaration of conformity, or the manufacturer indicates in the user manual the internet address where to find it. The new Declaration of conformity are already available directly on our web site at **www.neofeu.com** under the heading “declaration of conformity”.
- The EU type examination certificates has a lifespan limited to **5 years**.
- The products marking and the instructions of use are evolving to improve traceability and a clear identification of the manufacturer.
- All economic operators become responsible in the sourcing and distribution chain.

The conformity assessment procedure to be followed is either conformity to type based on internal production control plus supervised product checks at random intervals by a notified body (module C2) or conformity to type based on quality assurance of the production process assessed by a notified body (module D).

LIFESPAN 10 ANS

The NEOFEU PPE against fall from a height are designed to be used for many years in normal conditions of use and storage.

The lifespan depends on the using conditions.

Some particularly aggressive environments like marine, siliceous, chemical ones can reduce the PPE life span. In such cases, a particular attention must be paid to its protection and control before use.

The mandatory yearly inspection by an authorized competent person will certify the correct working conditions of the equipment and its serviceable condition. Only the manufacturer or its competent agent can decide in writing whether to put back the fall arrester into service or not.

TRAININGS



WEAR AND USE PERSONAL PROTECTIVE EQUIPMENT (PPE) FOR FALL PROTECTION



ANNUAL PERIODIC INSPECTION



MAINTENANCE AND REPAIR OF RETRACTABLE TYPE FALL ARRESTER

Contact us to discuss about your training needs !

ANNUAL MAINTENANCE

All PPE against falls from a height are classified as category 3 for lethal risk. They are subject to an **annual periodic inspection** from the date of first use.

NEOFEU has a dedicated **after sales service** to track and maintain your equipment in the best safety conditions. We also offer training sessions on how to inspect your PPE with respect to our inspection procedures.



STANDARDS
GUIDE

- EN 353-2 Guided type fall arresters on flexible anchor line
- EN 354 Lanyards
- EN 355 Shock absorbers
- EN 358 Belts & work or restraint positioning lanyards
- EN 360 Retractable type fall arresters
- EN 361 Full body harnesses
- EN 362 Connectors


- EN 397 Industrial protective helmets
- EN 795 Anchor devices
- EN 813 Sit harnesses
- EN 1497 Rescue harnesses
- EN 1891-A Low stretch kernmantel ropes
- EN 12841-A Rope access systems

FALL PROTECTION
SYSTEMS




FALL ARREST SYSTEMS

Intended to reduce the impact force on the user in case of fall.



RESCUE SYSTEMS

Intended for self rescue or to rescue an operator in case of a fall.



WORK POSITIONING
SYSTEMS

These systems are intended for work positioning or for restraint to prevent the operator from reaching hazardous areas.



SUSPENSION SYSTEMS

These allow the user to access from one working area to another using a rope.

THE COMPOSITION OF A
FALL ARREST SYSTEM

3 mandatory components !

ANCHOR
FULL BODY HARNESS
FALL ARRESTER



EN 795 TYPE
A⁽¹⁾ / B / C⁽¹⁾ / D⁽¹⁾ / E

⁽¹⁾ Not PPE

EN 361
EN 358
EN 1497
EN 813

EN 355
EN 353-1
EN 353-2
EN 360

Lifeline
Tripod
Webbing sling
Anchor point

Full body harness
Belt

Shock absorber
Guide type fall arrester
on anchor line
Retractable type fall
arrester

STANDARDS

TYPE OF
PRODUCTS





MAJOR RISKS RELEVANT TO
FALL ARREST SYSTEMS

- **Fall factor** : It determines the fall distance with regards to the anchor point.
- **Clearance** : Is the necessary vertical distance of free fall without obstacle.
- **Pendulum effect** : Occurs in case of lateral movement with regards to the fall arrester anchor point overhead the user and can cause severe injuries in the pendulum area in case of obstacle.

FALL
FACTORS

The fall factor determines the fall arrest distance with regards to the location of the anchorage point of the fall arrester.

It is recommended that the anchorage point is located above the user.

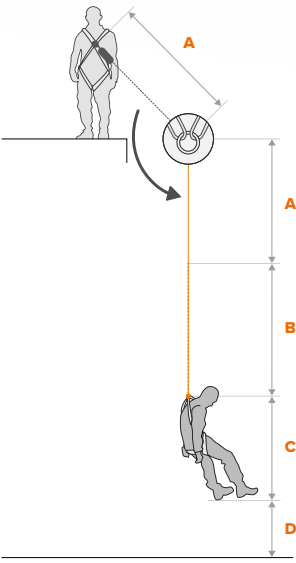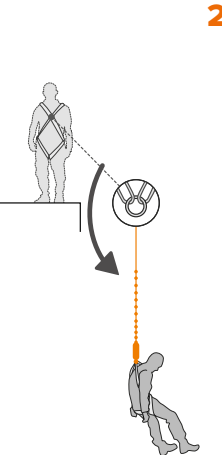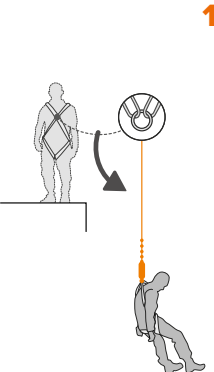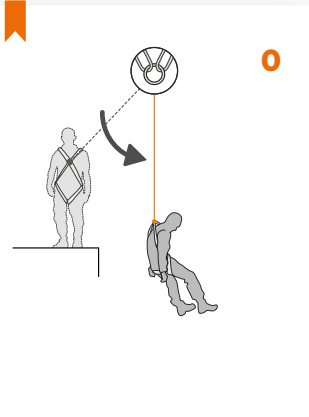

This is the necessary minimum vertical free fall distance under the user's feet without obstacle. It depends on the fall arrest equipment and the location of the anchorage point (see fall factor).


Minimum clearance = A + B + C + D

MINIMUM
CLEARANCE

- A Overall length of the fall arrest equipment in use
- B Arrest distance according to the fall arrest equipment in use
- C Distance between the fall arrest attachment point on the harness and the user's feet
- D 1 m of safety distance

PENDULUM
EFFECT

Occurs in case of lateral movement with regards to the fall arrester anchor point overhead the user and can cause **severe injuries** in case of **obstacle** in the pendulum area.

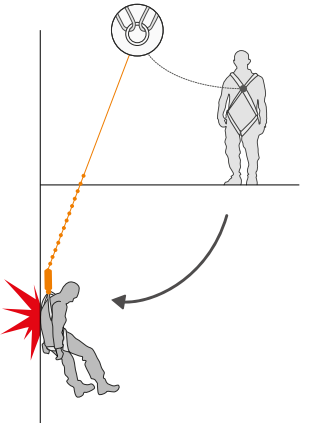



  Pack&G'O	  VIT'O	  ALT'O	  VIT'O TEC	  ILE'O	  ARB'O	  ALT'O
 EAGLE EDGE	 NEO020	 ASC'O	 NTREALU2	 ERG'O	 ERG'O	 ABS'O
 ABS'O EDGE	 ABS'O	 NLIFT	 Gamme TS	 ABS'O	 DROP'O	 PEGASO WORK
 PEGASO WORK	 IPN'O	 NSACET45L	 NTREL150	 NASL	 BLACK WIDOW	 LIGHT RANGE Load fall arrester Not a PPE.





MOBILE FALL ARRESTER ON FLEXIBLE ANCHORAGE LINE



EN 353-2

EN 12841-A

RfU 11.062


R ≥ 0.5

TESTED FOR HORIZONTAL USE (EDGE)

MAX

140 KG

TESTED FOR USE AT 140 KG



USE ON Ø11MM ROPE

ASC'O® is a mobile fall arrester in aluminum to use on **TWIST 11®** rope to secure your works at height.

In normal use, the device slides hands free on the rope up and down automatically.

Should a fall occur or in case of unexpected descent, **ASC'O®** locks instantly and secures the user.

With its **unique patented opening system**, **ASC'O®** mobile fall arrester associates comfort of use and maximum safety.

It can be locked on the rope to allow the user to remain hands free at any level of the rope.

EASY AND SAFE TO SET UP

Thanks to its innovative opening system, **ASC'O®** is very easy to use.



REFERENCES

 NSD19.P	 ABSO40.P	 NEX.35.P	 NTWISTC
--	---	---	--



PYLONIST / INDUSTRIAL MAINTENANCE HARNESS

EN 361 EN 358 EN 813 EN 1497

ILE'O® is a versatile fall arrest and rescue harness, providing comfort, strength and ease of use. Suitable for users up to 140kg, it comes with a lot of options and is donned like a vest.



ALUMINUM
AUTOMATIC
BUCKLES
+ INDICATOR



REPELLENT
WEBBING

4

4 ATTACHMENT
POINTS
BACK / FRONT / VENTRAL / POSITIONING



FALL
INDICATORS

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NUS140	NUS140..S	NUS140..ML	NUS140..XL	NUS140..XXL



FULL BODY AND RESCUE HARNESS

EN 361 EN 1497

The fall arrest harness VIT'O combines comfort, lightweight design, and safety, easily adapting to all body types thanks to highly efficient adjustment and locking systems.

The NUS87A version provides additional basic comfort with its elastic straps at shoulder level.



ALUMINUM
AUTOMATIC
BUCKLES
+ INDICATOR



REPELLENT
WEBBING

2

2 ATTACHMENT
POINTS
BACK / FRONT
POSITIONING WITH OPTIONAL BELT



FALL
INDICATORS

REFERENCES

Base	Back PAD	Extension strap	Back PAD + extension strap	Integrated belt	Belt + back PAD	Belt + extension strap	Belt + Back PAD + strap
NUS77A	NUS77AP	NUS77AEX	NUS77AEXP	NUS77C	NUS77CP	NUS77CEX	NUS77CEX
NUS87A	NUS87AP	NUS87AEX	NUS87AEXP	NUS87C	NUS87CP	NUS87CEX	NUS87CEX



NUS77AP



ROPE ACCESS HARNESS

EN 361 EN 358 EN 813 EN 1497

ALT'O® is a versatile, lightweight, and comfortable harness designed for rope access. It provides quick setup and easy adjustments, ensuring optimal comfort.



ALUMINUM
AUTOMATIC
BUCKLES
+ INDICATOR



REPELLENT
WEBBING

4

4 ATTACHMENT
POINTS
BACK / FRONT / VENTRAL / POSITIONING

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NUS130	NUS130..S	NUS130..ML	NUS130..XL	NUS130..XXL



TREE CLIMBING BELT

EN 358 EN 813

ARB'O® is seat belt for work positioning especially designed for tree climbing, providing optimal comfort with its breathable pads, wide back support, and quick adjustments.



ALUMINUM
AUTOMATIC
BUCKLES
+ INDICATOR



REPELLENT
WEBBING



DOUBLE
SUSPENSION
BRIDGE WITH
ALUMINUM RINGS



+ REPLACEMENT
DOUBLE BRIDGE IN
ARAMID INCLUDED

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NELUS150	NELUS150..S	NELUS150..ML	NELUS150..XL	NELUS150..XXL



NUS77A

NUS87A

EXCLUSIVE



REFERENCES

The **Pack&G'O** is ready to use instantly: the harness is ready to be put on right after the bag is turned over. Easy to store and transport, once folded, it provides **protection** for the harness.



Pack&G'O®

FULL BODY HARNESS WITH INTEGRATED TRANSPORT BAG

EN 361

Pack&G'O® is an innovative, exclusive, and patented full body harness. It incorporates a carrying bag to provide additional comfort to the user while allowing for quick storage.



STEEL AUTOMATIC BUCKLES + INDICATOR



REPELLENT WEBBING

2

2 ATTACHMENT POINTS BACK / FRONT



INTEGRATED TRANSPORT BAG



FALL INDICATORS

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NUS57P	NUS57P..S	NUS57P..ML	NUS57P..XL	NUS57P..XXL
Without bag / PAD				
NUS57	NUS57..S	NUS57..ML	NUS57..XL	NUS57..XXL



UNIQUE CONCEPT

IN 1 3

The bag



The harness



The lanyard



NUS55 / NUS55C

FULL BODY HARNESS / FULL BODY HARNESS WITH BELT

EN 361

+ EN 358 NUS55C

Fullbody harness bicolor in polyester webbing with 2 fall arrest attachment points (back and front), flat buckles for easy adjustment, and 2 fall indicators.



STEEL MANUAL BUCKLES



FALL INDICATORS

2

2 ATTACHMENT POINT BACK / FRONT / (POSITIONING NUS55C)

REFERENCES

Base	Size S	Size M/L	Size XL	Size XXL* *On request
NUS55	NUS55..S	NUS55..ML	NUS55P..XL	NUS55..XXL
With integrated work positioning belt				
NUS55C	NUS55C..S	NUS55C..ML	NUS55C..XL	NUS55C..XXL

ECO

FULL BODY HARNESS

EN 361

+ EN 358 NUSL4ECO

Economical full body harnesses with 1, 2, or 3 attachment points (3 models available). Available in one size fits all.



STEEL MANUAL BUCKLES



UNIQUE SIZE

REFERENCES

1 attachment point	2 attachment points	3 attachment points + work positioning belt
NUSL1ECO	NUSL2ECO	NUSL4ECO

FULL BODY HARNESS WITH INTEGRATED SYSTEM

KTP EVO

The **KTP EVO** harnesses are complete fall protection systems ready to use.



KTPEVO2



KTPEVO4



KTPEVO6




KTPEVO9



KTPEVO11



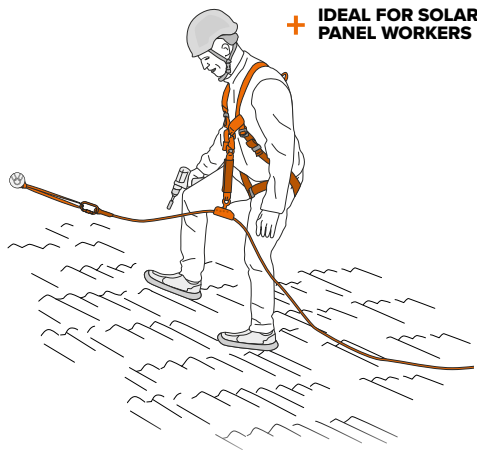


NKITTOIT1 | ROOF SET

INCLUDED




NKITXLBAT2 | CONSTRUCTION SET

INCLUDED

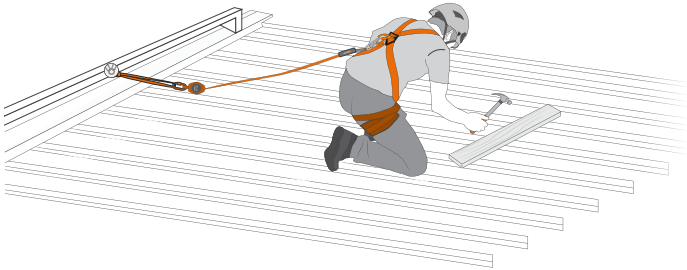


NKITTECO4 | ECO ROOF SET

INCLUDED

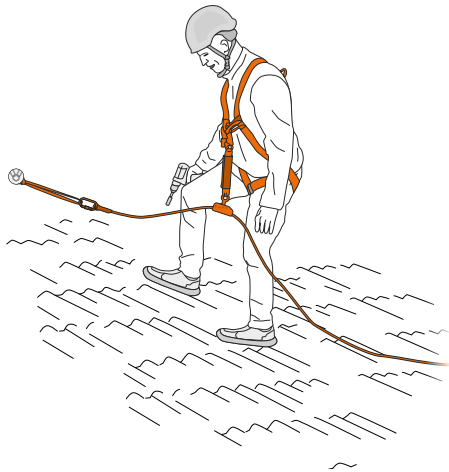


NKITPOTEAU | POLE SET

INCLUDED

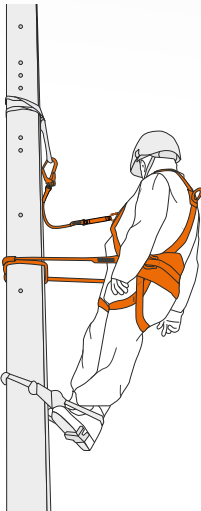


NKITPLATEFORME | PLATFORM SET

INCLUDED

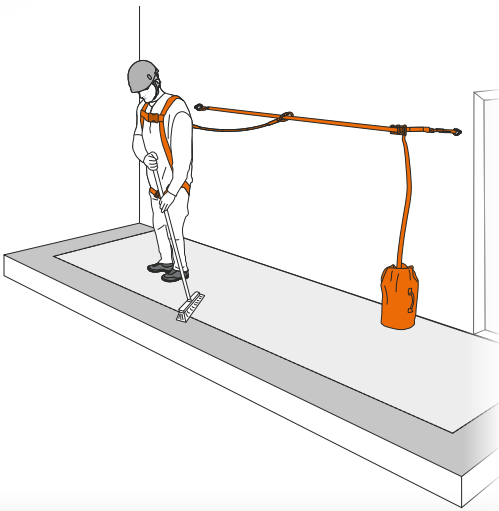

NKITECHAF2 | SCAFFOLD SET

INCLUDED

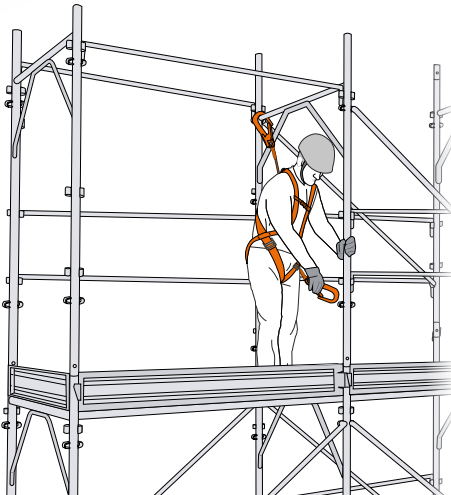

Packaging in cardboard box


The industry sets are offered in cardboard boxes, providing a practical, appealing presentation suitable for all shelves. They are easy to transport and store.



Ideal presentation by industry



The box is sealed



Storage optimization



Dimensions : 430 x 300 x 160 mm

REFERENCES

Standard	Cardboard box
NKITTOIT1	NKITTOIT1.BC
NKITECO4	NKITECO4.BC
NKITNACEL1	NKITNACEL1.BC
NKITECHAF2	NKITECHAF2.BC
NKITXLBAT2	NKITXLBAT2.BC
NKITPOTEAU	NKITPOTEAU.BC
NKITPLATEFORME	NKITPLATEFORME.BC

SHOCK ABSORBER LANYARDS

ABS'O® | NHEA10 NHEYA10

SHOCK ABSORBER WITH INTEGRATED ELASTIC LANYARD

EN 355 RfU 11.062 RfU 11.074

The elastic lanyard allows users to have greater freedom of movement, making it easier for them to move around the work site.

TESTED TO HORIZONTAL USE (ED)GE

MAX

140 KG

TESTED FOR USE UP TO 140 KG

ELASTIC WEBBING LANYARD = REDUCED DIMENSIONS

REFERENCES				
Model	Base	Connectors ⁽¹⁾		
		Aluminum triple lock	Aluminum triple lock + steel large opening	Aluminum triple lock + aluminum large opening
Single	NHEA10	NHEA10MM	NHEA10MB	NHEA10MC
Double	NHEYA10	NHEYA10MM	NHEYA10MB	NHEYA10MC

range ELGE



CONNECTING AND RESTRAINT LANYARDS

NLS NLSY NLD NLDY

CONNECTING LANYARD

EN 354

Single or double, webbing or rope, the connecting lanyard will restraint the user's movement to prevent a fall from height.

SINGLE

ROPE

STANDARD : 1m / 1m3 / 1m7
CUSTOM : Jusqu'à 5m

REFERENCES				
Single	Double	1 m	1,3 m	1,7 m
NLSxx	NLSYxx	NLS10 / NLSY10	NLS13 / NLSY13	NLS17 / NLSY17
NLDxx	NLDYxx	NLD10 / NLDY10	NLD13 / NLDY13	NLD17 / NLDY17

ERG'O®

ADJUSTABLE WORK POSITIONING LANYARD

EN 358

Thanks to its ergonomic tensioner and aluminum connectors, **ERG'O®** is efficient, durable, and easy to use.

ERGONOMIC TENSIONER

POLYAMIDE ROPE Ø12MM

ABRASION-RESISTANT PROTECTIVE SHEATH

MAX

140 KG

TESTED FOR USE UP TO 140 KG

REFERENCES				
Base	2 m	3 m	4 m	
NLR..MV	NLR20MV	NLR30MV	NLR40MV	



ABS'O® | NSAT13 / 17 NSYAT13 / 17 NDAT13 / 17 NDYAT13 / 17 NEA13 / 17 NEYA13 / 17

SHOCK ABSORBER WITH INTEGRATED LANYARD

EN 355 RfU 11.062 RfU 11.074

Available in webbing, rope, or elastic webbing, the fall arrest lanyard is available in **1,3m** or **1,7m** versions excluding connectors.

WEBBING

ROPE

ELASTIC

REFERENCES			
Single	Double	1,3 m	1,7 m
NSATxx	NSYATxx	NSAT13 / NSYAT13	NSAT17 / NSYAT17
NDATxx	NDYATxx	NDAT13 / NDYAT13	NDAT17 / NDYAT17
NEAxx	NEYAxx	NEA13 / NEYA13	NEA17 / NEYA17



Packaging in cardboard box

The lanyards are also available in cardboard boxes, providing a more convenient, appealing, and shelf-friendly presentation. They are easy to carry and store.


REFERENCES Add .BC to your product reference.



Ideal presentation of features



The box is sealed



Storage optimization



Dimensions : 140 x 140 x 250 mm



(1) Consult our general catalogue to see all available connectors.



EAGLE EDGE®

WEBBING RETRACTABLE TYPE FALL ARRESTER

EN 360 RfU 11.060 RfU 11.062

Lightweight and compact fall arrester with a 6m automatic retractable webbing lanyard.

TESTED TO HORIZONTAL USE (EDGE)
R ≥ 0.5

MAX
140 KG

TESTED FOR USE UP TO 140 KG

6M DYNEEMA WEBBING

REFERENCE
NEO060

NEO EDGE | EVO®

CABLE RETRACTABLE TYPE FALL ARRESTER

EN 360 RfU 11.060 RfU 11.062

Fall arrester easily transportable with its textile handle and equipped with a 12m automatic retractable cable lanyard.

TESTED TO HORIZONTAL USE (EDGE)
R ≥ 0.5

MAX
140 KG

TESTED FOR USE UP TO 140 KG

12M STEEL CABLE

REFERENCE
NEO120EVO



EDGE | NEO020

WEBBING RETRACTABLE TYPE FALL ARRESTER

EN 360 RfU 11.060 RfU 11.062 RfU 11.085

Antichute léger avec longue sangle rétractable automatique de 2m et équipé d'un absorbeur d'énergie.


TESTED TO HORIZONTAL USE (EDGE)
R ≥ 0.5

MAX
140 KG

TESTED FOR USE UP TO 140 KG

2.5M HIGH-DENSITY POLYETHYLENE WEBBING

TESTED FOR FALL FACTOR 2

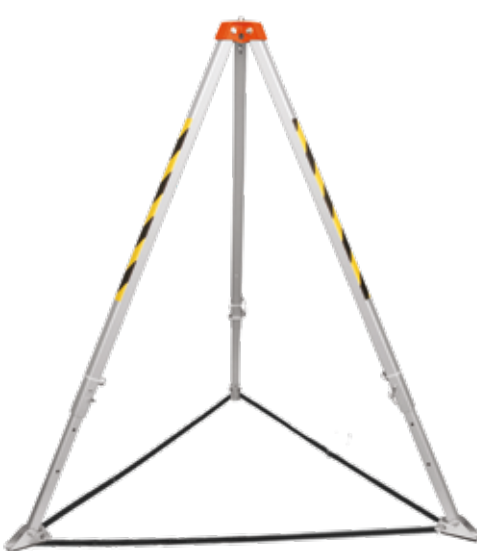

NTREALU2

ALUMINUM TRIPOD

MAX
200 kg

EN 795 TYPE B

The NTREALU2 aluminum tripod is easy to transport, quick to set up, and allows to set up pulleys for a retractable type fall arrester, as well as a hoist for lifting.

HEAD WITH 4 ANCHORING POINTS

REINFORCED ALUMINUM FOOT

TELESCOPIC STRUCTURE

TRANSPORT BAG
NSACTRE2

NLDVM/2

TEMPORARY WEBBING ANCHOR LIFELINE SET

EN 795 TYPE B

NLDVM is a temporary anchorage device with webbing slings at both ends, enabling a quick and secure set up thanks to its steel ratchet tensioner.

DESIGNED FOR USE BY 2 USERS



LAN'O®

ADJUSTABLE ANCHOR STRAP

EN 795 TYPE B

LAN'O has been designed to create a reliable anchoring point around a perimeter structure ranging from 50 cm to 10 meters



5m : NAR5
10m : NAR10

NAS / NASL

WEBBING SLING

EN 795 TYPE B

Light <-> 21 mm
Strong <-> 30 mm



FIXED ANCHOR POINTS

EN 795 TYPE A

NLDVALU12

NPLAANC

NCLI100

NCLI200





PEGASO WORK

COMFORTABLE VENTILATED HELMET FOR INDUSTRIAL ENVIRONMENTS

EN 397

PEGASO WORK is a ventilated, comfortable work helmet designed to provide user protection against falling objects in industrial environments (working at heights, construction sites, etc.).



SANITIZED®
INTERNAL
FABRIC



EXTERNAL
SHELL
IN ABS



VENTILATED
HOLES WITH
MESH



EASY
TURN 3D



PRECISE
ADJUSTMENT
WHEEL



LIGHTWEIGHT
DESIGN
340G



REFERENCES

Orange Helmet	White Helmet	Visor	Earmuffs	Earmuffs adapters
NCAS019.025	NCAS019.001	NCAS021.119	NCAS024.019	NCAS026.019



VISOR



EARMUFFS



ADAPTERS



TRANSPORT BAGS

Discover our range of dedicated bags designed to store your work equipment. Practical and secure solutions for efficiently transporting and storing your gear during your missions.



NSACNEW100

15 L



NSACTRA.NEO.N

35 L



NSACT35L.NEO

35 L



NSACBG27L

27 L



NSACBG40L

40 L



NSACET45L.NEO.N

45 L → 55 L

TOOLS TETHERING

Secure your tools during work at height with our range of fall protection equipment. A reliable solution to prevent object falls and ensure safety on construction sites.



NLG355



NLG362



NLG372



NLG363




MADE
IN
FRANCE

IN EACH CASE,
ONE SOLUTION

NEOFEU load arresters consist in an efficient solution in many fields of applications to automatically arrest the fall of a load. They offer an additional protection in case of failure of the primary system intended to restraint or transport the loads. NEOFEU load arresters work on both static and moving loads through their automatic retracting cable. In case of failure and consecutive fall, the brake activates and locks the load on a short distance : less than 60 cm for **L** range and less than 1 m for **BIG** range.

Beyond a wide range of standard devices, we also study your specific configurations of loads to secure, dimensions and range of movements. We adapt to your workplace requirements and to the standards of your industry. Contact us.

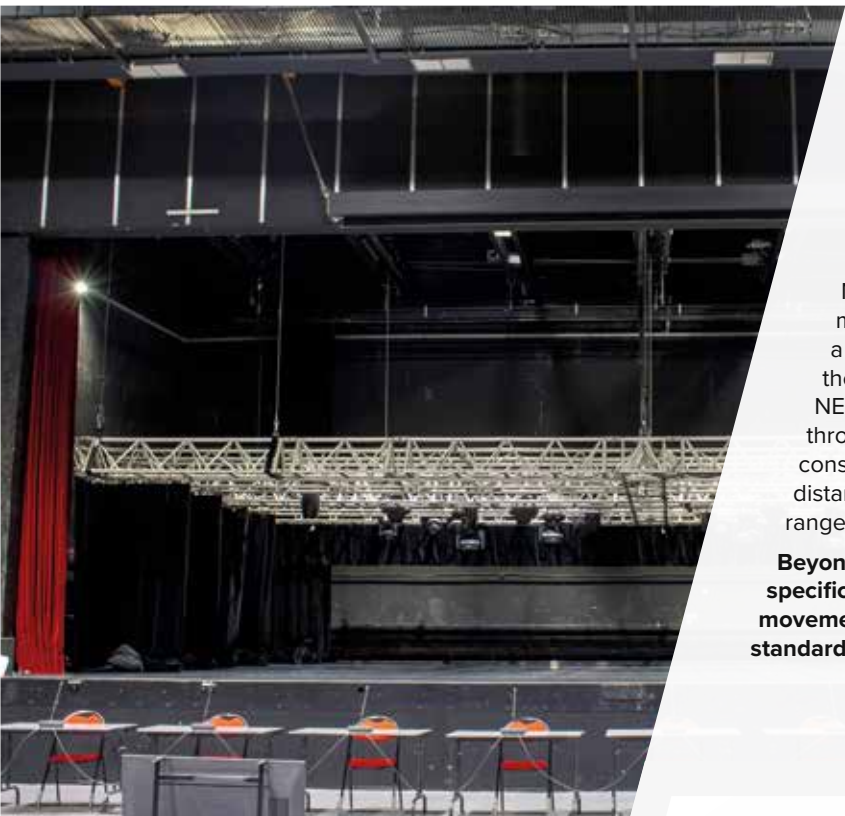

L RANGE

Machinery Directive 2006/42/CE



+ CATAPHORESIS
TREATMENT

KG
500 KG

UP TO
500 KG



GALVANIZED
STEEL
CABLE

REFERENCES

Go to our general catalog to view all available REFERENCES (models, maximum loads, dimensions, ...).



BIG RANGE

Machinery Directive 2006/42/CE



VERSION 1



VERSION 2

KG
5 T

UP TO
5 TONS



GALVANIZED
STEEL
CABLE



SPECIFIC
CONFIGURATIONS



* Cataphoresis refers to an anticorrosion treatment achieved through electrophoretic deposition.

Fall Protection Only

CUSTOMER SERVICE

Monitoring, advice, technical information, user manuals - our customer service will assist you throughout the entire **NEOFEU** range.

This service, located in **France**, is available to you from Monday to Friday, from 8:³⁰AM to 5:³⁰pm.



BY PHONE

+33 (0) 4 78 48 75 33



BY EMAIL

neofeu@neofeu.com

GENERAL CATALOGUE

Go to our general catalogue and explore our full range of products and get all technical information.

neofeu)



OFFICES AND PRODUCTION SITE

8 Allée de l'Industrie - Z.I R.Bloch - Chassagny
F69700 Beauvallon France

Tel. : +33 (0) 4 78 48 75 33 - Fax : +33 (0) 4 78 48 77 45

neofeu@neofeu.com
neofeu.com

YOUR RESELLER